
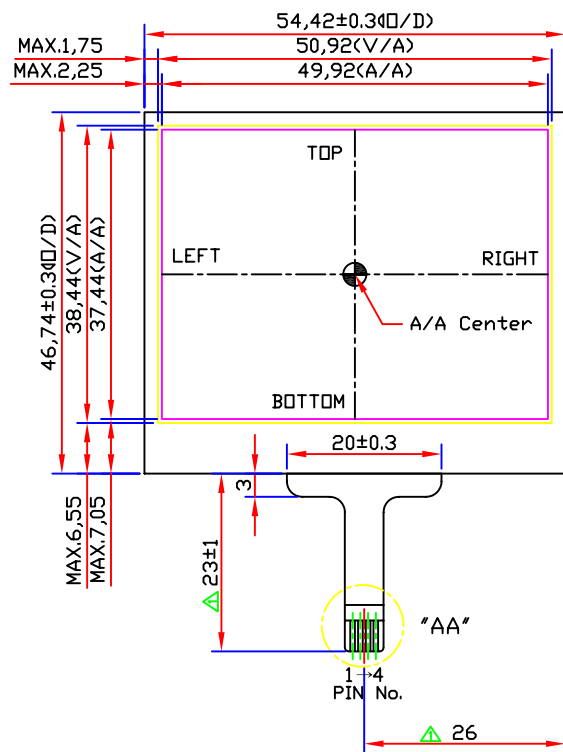


REMARK

RoHS Compliant


1. Glass Thk: 0.7mm
2. Film Type: Non-Glare
3. Total Thk: 0.95±0.15mm
4. Linearity: ±1.8% or less
5. Transmittance: 80% or more
6. Resistance
200 < Y < 900 ohm
200 < X < 900 ohm
7. Connector: FPC
8. General Tolerance: ±0.3

CIRCUIT DIAGRAM




SIGNAL ASSIGNMENT

Pin No	Signal
1	Left
2	Bottom
3	Right
4	Top

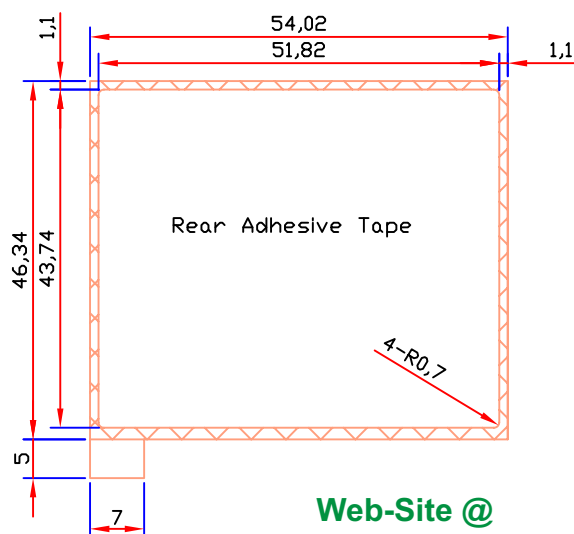

NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: www.hantouchUSA.com, under Incoming Inspection Standards.

Detail "AA"

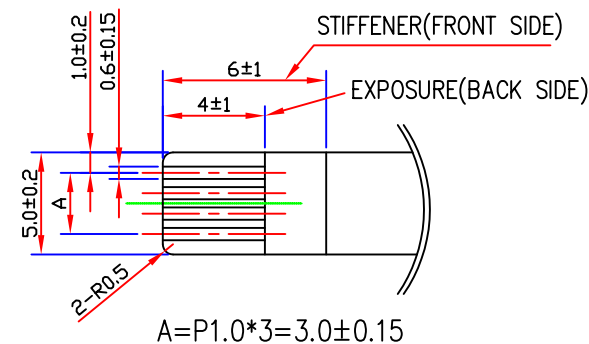

Web-Site @
www.hantouchusa.com

APPROVE	STD.TOL	UNIT	mm	DRAWING NO.	REV.
		SCALE	NONE	H4025A-NCOFA25-R	1
DESCRIPTION	SHEET				
2.5" TOUCH PANEL	1/1				

REV.No	REVISED	DATE	DRAWN	CHECKED	APPROVED	DRAW
1	△ FPC Change	06.07.22	H.Y. IM	K.B. KIM	T.S. KANG	CHECK
0	NEW DRAW	06.07.19	H.Y. IM	K.B. KIM	T.S. KANG	DESIGN

HantouchUSA
Touch Screen Specialists